



EMERGENCY LIGHTING INVERTER

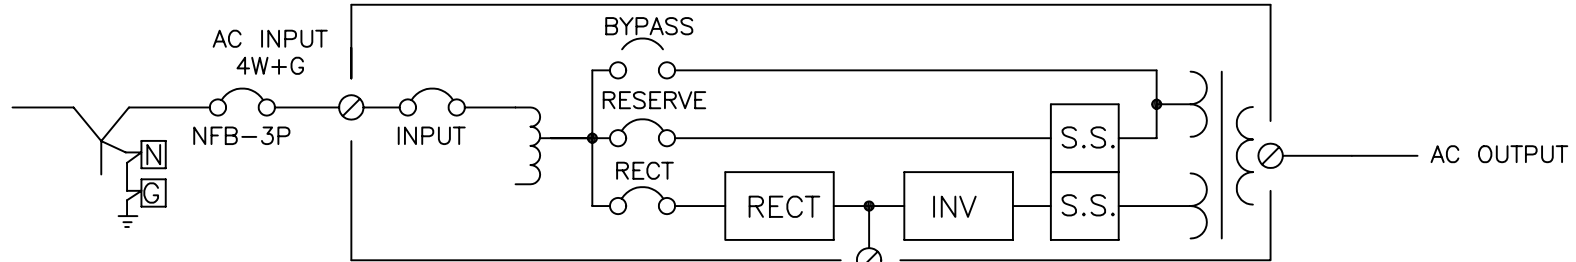

AC INPUT

208/120	480/277	600/347	Vac (NOMINAL)
225	100	80	Amp SERVICE REQUIRED
			60 Hz
			3 PHASE
			4 WIRE PLUS GROUND

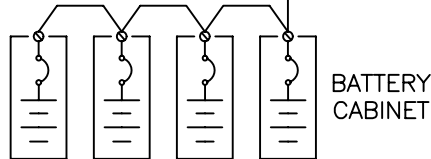

BATTERY CABINET

AC OUTPUT

208/120	480/277	600/347	Vac (NOMINAL)
111.1	48.2	38.5	Amps (MAXIMUM)
			60 Hz
			3 PHASE
			4 WIRE PLUS GROUND

BATTERY DATA

BATTERIES: Always On

TYPE: VRLA

RUN TIME: 120 MINUTES


BTU RATING

BTU 11690  
KW 3.47

STANDARD

SNMP  
F.A. CONTACTS  
AS400 CARD

<b>Always On UPS Systems Inc.</b>		Kelowna B.C. alwayson.com PH:877-259-2976	
BOREALIS 40KW SINGLE LINE 120 MINUTE BBU		Reproduction and/or use without express permission is prohibited by law.	
FILE: BOREALIS 40KW 120MIN		VERSION: 1.0	DRAWN BY: HL
PAGE: 1/2	DATE: 080724	PROJECT: BOREALIS	DESIGNED BY: AA

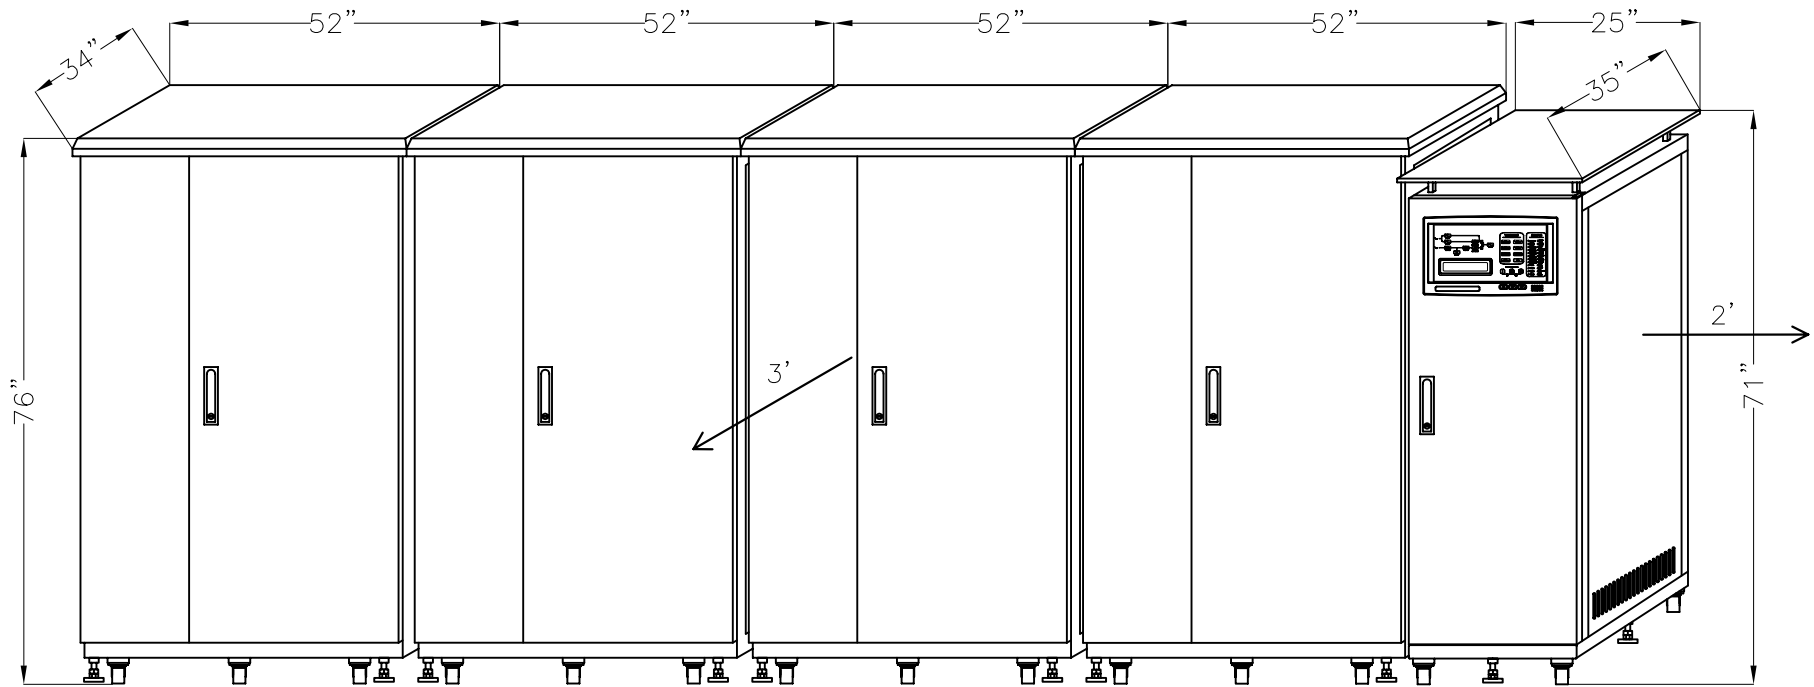

BATTERY CABINET  
52"X34"X76"

BATTERY CABINET  
52"X34"X76"

BATTERY CABINET  
52"X34"X76"

BATTERY CABINET  
52"X34"X76"

ELI CABINET WITH DRIP SHIELD  
25"X35"X71"

**WEIGHT**

ELI CABINET 1565LBS / 710KG  
BATTERY CABINET 4X3890LBS / 4X1764KG

**STANDARD**

DRIP SHIELD

**Always On UPS Systems Inc.** Kelowna B.C.  
alwayson.com PH:877-259-2976

BOREALIS 40KW DIMENSION  
120 MINUTE BBU

Reproduction and/or  
use without express  
permission is  
prohibited by law.

FILE: BOREALIS 40KW 120MIN

VERSION: 1.0

DRAWN BY: HL

PAGE: 2/2

DATE: 080724

PROJECT: BOREALIS

DESIGNED BY: AA